


HSS

Combination Drill & Taps


WORKING THICKNESS up to 3.5mm thick



Lubricant is recommended when cutting metals

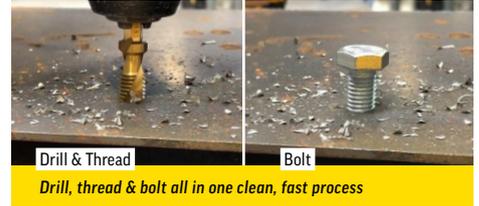

Drill, thread & bolt all in one clean, fast process

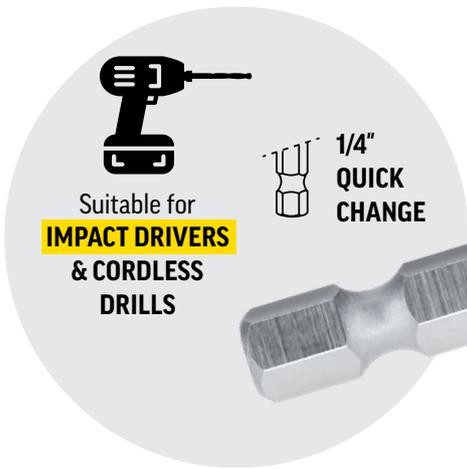

Suitable for **IMPACT DRIVERS & CORDLESS DRILLS**

1/4" QUICK CHANGE

Titanium nitride coating reduces heat & increases lubricity for extended life

135° Split Point cuts faster & reduces wandering

Drill, tap & deburr ferrous & non-ferrous metals in one operation up to 3.5mm

Fully ground M2 HSS raw material for extended life



CARDED

METRIC COARSE		UNC	
Ø	CARDED 1 PCE	Ø	CARDED 1 PCE
3.0	DTMC030	6G	DTUNC6G
4.0	DTMC040	8G	DTUNC8G
5.0	DTMC050	10G	DTUNC10G
6.0	DTMC060	12G	DTUNC12G
8.0	DTMC080	1/4"	DTUNC14
10.0	DTMC100	5/16"	DTUNC516
		3/8"	DTUNC38

25 PCE Combination Drill & Tap Set

CONTAINS:

- 13 x Combination Drill & Taps
- Metric Coarse: M3 - M10
- UNC: 6G - 12G & 1/4" - 3/8"
- 12 x IMPACT Hex Drive Drill Bits 2.0 - 6.5mm

Sturdy plastic storage case

Code: CDT25PB



Also available: C.D.T Cutting Lubricant - formulated for extreme cutting performance when tapping, drilling or reaming into all metals. code: ATL005

©COPYRIGHT SHEFFIELD GROUP 2023. No part of this publication may be copied, scanned or reproduced in whole or part in any form without written permission from Sheffield Group. 20210311